

Data sheet Receiver Compact-V

Compact-V AC-R33




For large applications in the AC range

- Voltage: 4–250 V/AC
- Small, compact and robust housing design
- Protection class IP 65
- CE
- Individually adapted solution according to specifications

Technical data

Power Supply	40–250 V/AC
Max. switching current	4 A
Outputs	33 relays or 30 relays + 3 optocoupler outputs
Inputs	4 x digital
Emergency stop relay	forcibly actuated
Antenna	external
Weight	1,500 g

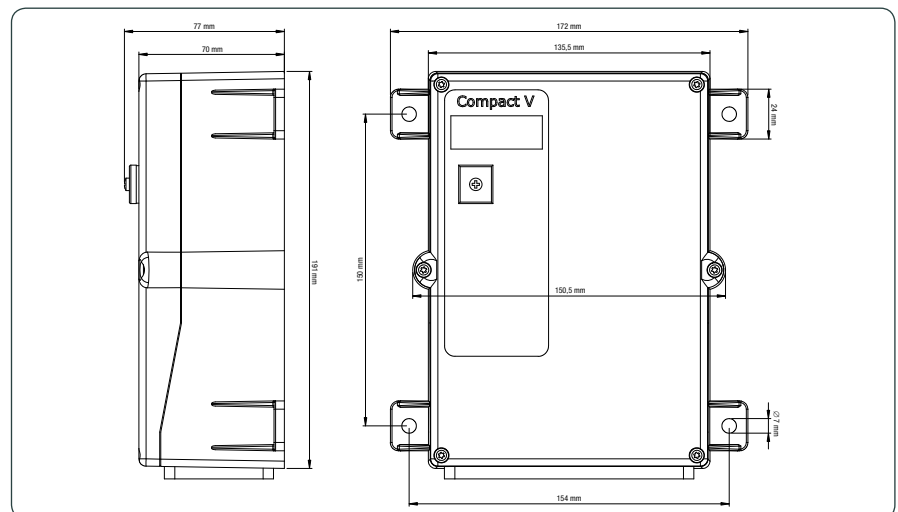

Options

- Interface: RS232, 1 x CAN bus
- Outputs: 4–20 mA, 0–10 V/DC
- Configuration of some functions with DIP switch
- The receiver is also available as an attachment housing